

## Transient Voltage Suppressors Array for ESD Protection

### ESD05V36T-5L

#### Description

The ESD05V36T-5L is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium.


#### Feature

- u 100 Watts Peak Pulse Power per Line (tp=8/20µs)
- u Protects five I/O lines
- u Low clamping voltage
- u Working voltages : 5V
- u Low leakage current
- u IEC61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- u IEC61000-4-4 (EFT) 40A (5/50ns)
- u IEC61000-4-5 (Lightning) 5A (8/20µs)


#### Applications

- u Cellular Handsets and Accessories
- u Cordless Phones
- u Personal Digital Assistants (PDA's)
- u Notebooks and Handhelds
- u Portable Instrumentation
- u Peripherals
- u MP3 Players

SOT-363



#### Functional Diagram



#### Mechanical Data

- u JEDEC SOT-363 Package
- u Molding Compound Flammability Rating : UL 94V-0
- u Weight 7.0 Milligrams (Approximate)
- u Quantity Per Reel : 3,000pcs
- u Reel Size : 7 inch
- u Lead Finish : Lead Free

#### Mechanical Characteristics

Symbol	Parameter	Value	Units	
P <sub>PP</sub>	Peak Pulse Power (tp=8/20µs waveform)	100	W	
T <sub>L</sub>	Lead Soldering Temperature	260 (10sec)	°C	
T <sub>STG</sub>	Storage Temperature Range	-55 to +150	°C	
T <sub>J</sub>	Operating Temperature Range	-55 to +150	°C	
	IEC61000-4-2 (ESD)	Air Discharge Contact Discharge	±15 ±8	KV
	IEC61000-4-4 (EFT)	40	A	
	IEC61000-4-5 ( Lightning )	5	A	

# Transient Voltage Suppressors Array for ESD Protection

## ESD05V36T-5L

Electrical Characteristics (@ 25°C Unless Otherwise Specified)

Part Number	Device Marking	V <sub>RWM</sub> (V) (Max.)	V <sub>B</sub> (V) (Min.)	I <sub>T</sub> (mA)	V <sub>C</sub> @1A (Max.)	V <sub>C</sub>		I <sub>R</sub> (μA) (Max.)	C (pF) (Typ.)
						(Max.)	(@A)		
ESD05V36T-5L	WF	5.0	6.0	1	9.8	12.5	5	1	50

Fig1. 8/20μs Pulse Waveform

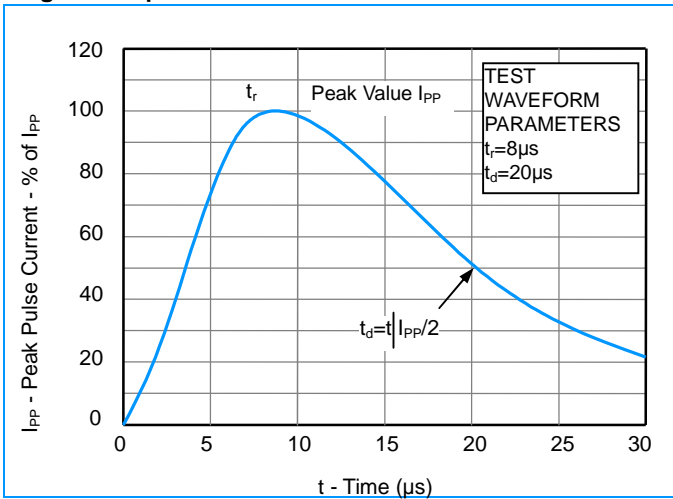


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)


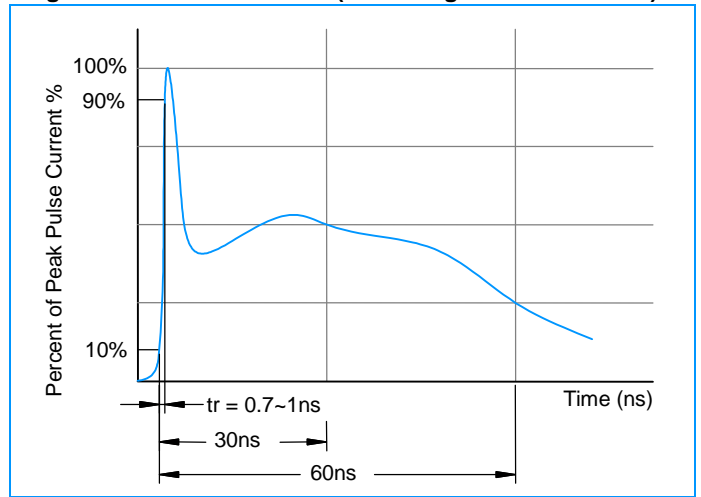



Fig3. Power Derating Curve

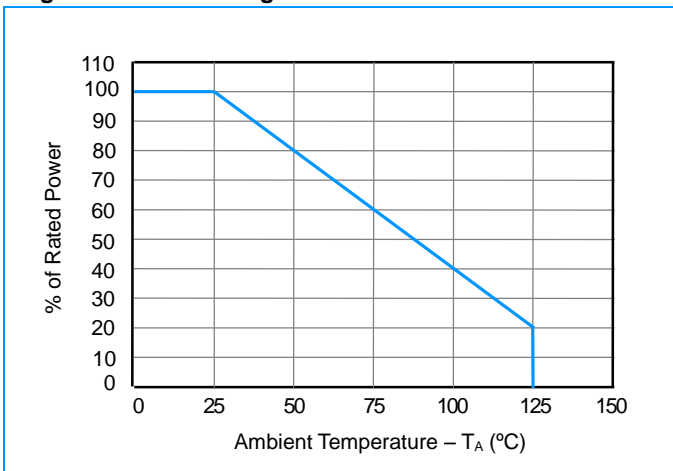


# Transient Voltage Suppressors Array for ESD Protection

## ESD05V36T-5L

### SOT-363 Package Outline & Dimensions

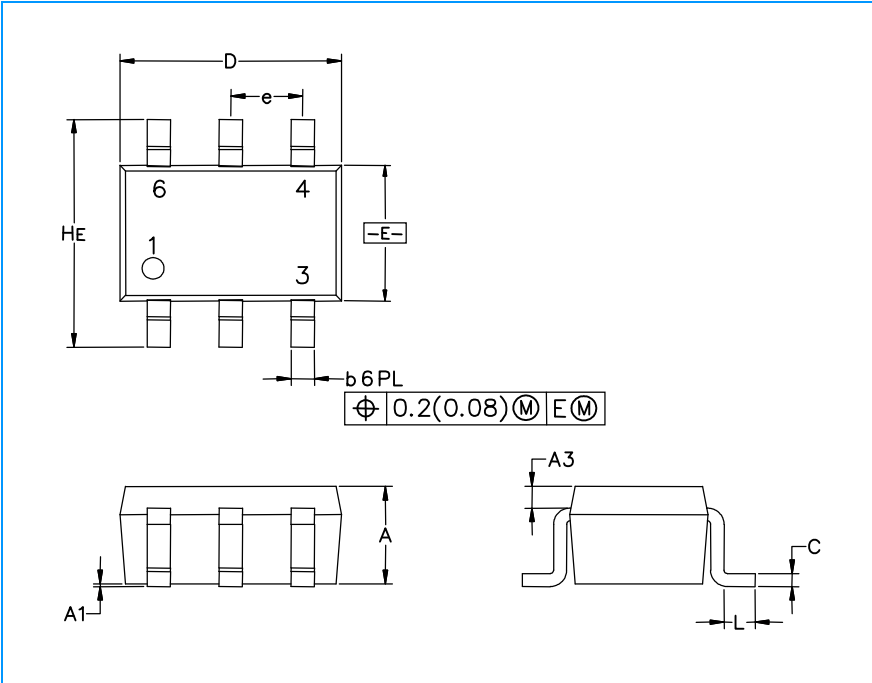

Symbol	Inches			Millimeters		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.031	0.037	0.043	0.80	0.95	1.10
A1	0.000	0.002	0.004	0.00	0.05	0.10
A3	0.08 REF			0.2 REF		
b	0.004	0.008	0.012	0.10	0.21	0.30
C	0.004	0.005	0.010	0.10	0.14	0.25
D	0.070	0.078	0.086	1.80	2.00	2.20
E	0.045	0.049	0.053	1.15	1.25	1.35
e	0.026 BSC			0.65 BSC		
L	0.004	0.008	0.012	0.10	0.20	0.30
HE	0.078	0.082	0.086	2.00	2.10	2.20

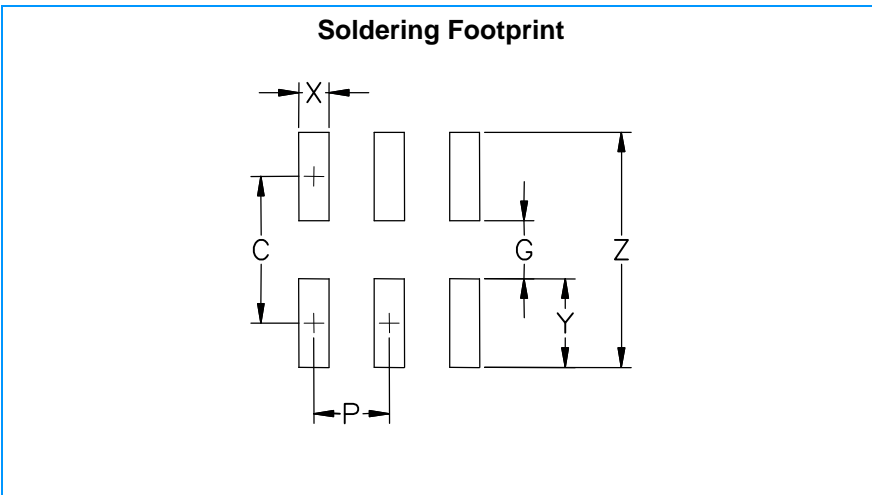

Symbol	Inches	Millimeters
C	0.0748	1.9
G	0.055	1.40
P	0.025	0.65
X	0.0157	0.40
Y	0.019	0.50
Z	0.0945	2.4